

# BANSHEE

## Ex Duplo Siren S1



### PRODUCT CODE

110V - BFSM110  
220V - BFSM220

This motorised siren is suitable for use in fiery mines as well as petrochemical plants and areas where an explosion-protected device is required. The unit consists of a 304 type stainless steel housing with a M20 cable entry, a stainless steel nose cone and a unique screw on lid for cable connection.

### BANSHEE EX DUPLO SIREN S1

SPECIFICATIONS	
VOLTAGE	110V AC/DC   220 V AC/DC
DUTY CYCLE	Continuous (Thermal cut-out protected)
SOUND OUTPUT	123dB(A) at 1m
SOUND FREQUENCY	950 - 1200Hz
APP. RANGE	1000m in still air on open field
CURRENT CONSUMPTION*	110VAC/DC - 2A   220VAC/DC - 1A
CLASSIFICATION	Ex db I Mb   Ex db IIC T6 Gb   Ex tb IIIC T85°C IP65 Db
CERTIFICATION	MASC MS/19-9003X
GAS GROUPS	I, IIA, IIB, IIC, IIIA, IIIB, IIIC
IGNITION GROUP	T6 - 85°C
IP RATING	IP65
WEIGHT	11.3kg
PACKING DIMENSIONS	200x250x200mm


\*Startup current x8 of nominal current

### AVAILABLE IN THE FOLLOWING MATERIALS

Standard Stainless Steel with brass flanges

Complete 304 Stainless Steel

Complete 316 Stainless Steel

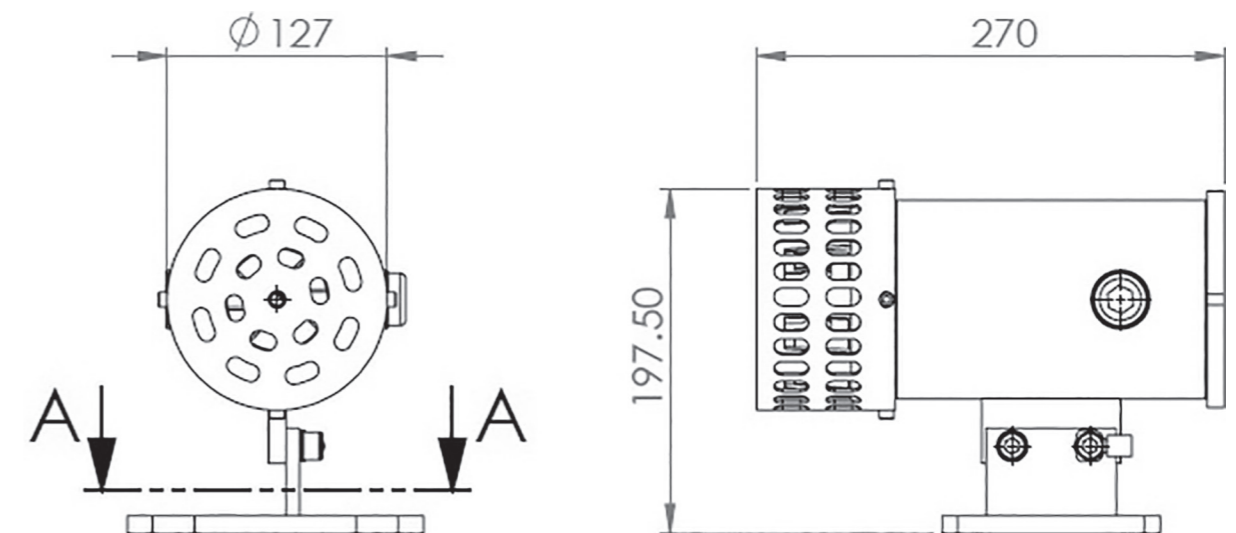

All dimensions are in mm

**BANSHEE** Part of the KAMA Group - [www.kama.co.za](http://www.kama.co.za)