



This compact, third-generation 500m siren features a UV-stabilised ABS body and a BKV glass-filled nylon impeller. It delivers powerful low-frequency sound, ideal for long-range signalling in noisy environments. Installation is simple with an M20 cable gland and slotted mounting bracket.

A reliable siren with a 5 year warranty*

Typical applications:

Alarm and signalling systems, pre-start warnings, fire/evacuation alerts, timekeeping, and school bells.

SHORT RANGE SIREN CE

Sirenco 500SA

SPECIFICATIONS

VOLTAGE	12VAC/DC 24VAC/DC 110VAC/DC 220VAC/DC
DUTY CYCLE	12V/24V:5min on - 15min off 110V/220V: Continuous
SOUND OUTPUT	107dB(A) @ 1m
SOUND FREQUENCY	1250 Hz
APP. RANGE	500m in ideal conditional (Refer to dB chart)
MOTOR	200W @ 9000 rpm
CURRENT CONSUMPTION	12V - 10.6A 24V - 7.5A 110V - 1.0A 220V - 0.7A
IP RATING	IP 44
WEIGHT	1.2kg
PACKING DIMENSIONS	190mm x 150mm x 150mm


NOTES |

PRODUCT CODES

Code	SA05012	SA05024	SA05110	SA05220					
Detail	12Vac/dc	24Vac/dc	110Vac/dc	220Vac/dc					

TECHNICAL DRAWINGS

All dimensions in mm

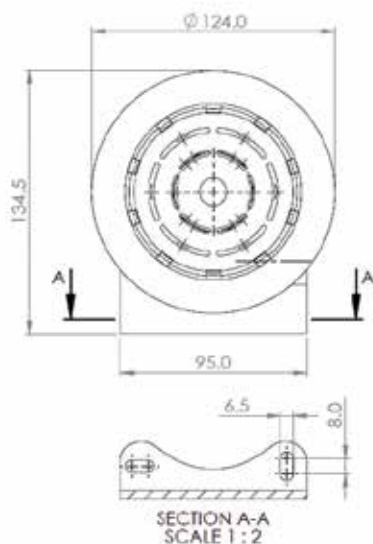

OPTIONAL

School & Factory Timer

