



Combining the Sirenco MONO siren with an integrated LED beacon for dual signalling. The beacon can operate with or independently from the siren.

Comes with a 5 year warranty*

Typical applications:
Areas requiring visual alerts in addition to sound, ideal where hearing protection is used or multiple alert stages are needed.

COMBINATION UNITS CE

Sirenco MONO Combo

SPECIFICATIONS

VOLTAGE	12VDC 24VDC 110VAC 220VAC
DUTY CYCLE	Continuous Rated
SOUND OUTPUT	123dB(A) at 1m
SOUND FREQUENCY	950 - 1200Hz
APP. RANGE	1000m in ideal conditional (Refer to dB chart)
CURRENT CONSUMPTION	12VDC - 10A 24VDC - 6A 110VAC - 2A 220VAC - 1.5A
LIGHT SOURCE	9W LED - 40 SMD 360 °
IP RATING	IP 65
WEIGHT	2.5kg
PACKING DIMENSIONS	150mm x 150mm x 390mm

NOTES | Available with a Amber, Red, Green or Blue LED light

PRODUCT CODES


Code BCSL(x*)01 BCSL(x*)02 BCSL(x*)04 BCSL(x*)05

Detail 12V 24V 110V 220V

* x = A for Amber / B for Blue / G for Green / R for Red

TECHNICAL DRAWINGS

All dimensions in mm

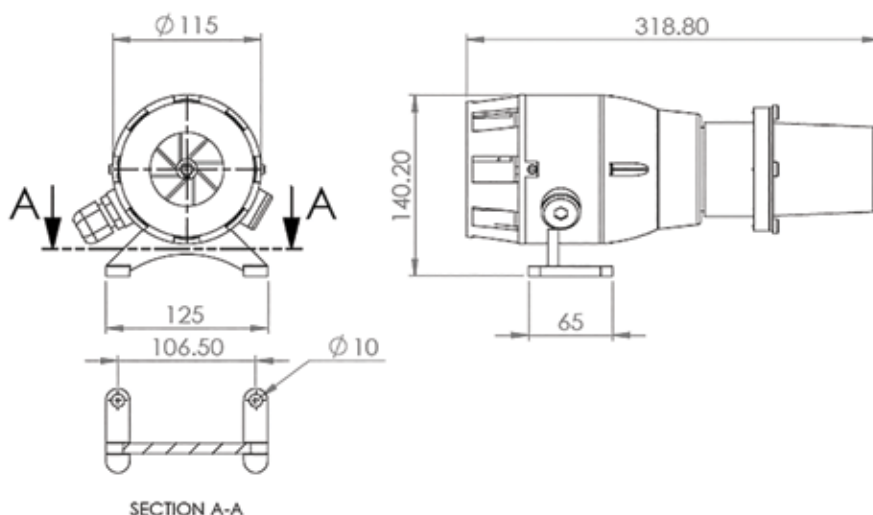

OPTIONAL

Finger Guard



School & Factory Timer

