



Compact electronic sounder in a UV-stabilised ABS/PC blend. Offers selectable, adjustable tones with ultra-low power consumption (<50mA).

Also available in a combination unit with an LED Beacon

Comes with a 5 year warranty*

Typical applications:

Fire panels, control panels, vehicle reverse alarms, automated systems, cranes, and food industry environments.

ELECTRONIC SOUNDERS, BELLS,
HORNS & HOOTERS



Sirenco 3 Stage Sounder

SPECIFICATIONS

VOLTAGE	9 - 30Vdc 70-260Vac
DUTY CYCLE	Continuous Rated
SOUND OUTPUT	114dB at 1m / 32 Selectable Tones / 3 Stages
SOUND FREQUENCY	420 - 2900Hz
APP. RANGE	600m in ideal conditional (Refer to dB chart)
OPERATION	Electronic
CURRENT CONSUMPTION	Amps vary 3-39mA depending on the sound selection
IP RATING	IP 65
WEIGHT	220g
PACKING DIMENSIONS	120mm x 120mm x 130mm


NOTES | Available in a combo unit

PRODUCT CODES

Code	SEMT930	SEMT122				
Detail	9-30Vdc	70-260Vac				

TECHNICAL DRAWINGS

All dimensions in mm

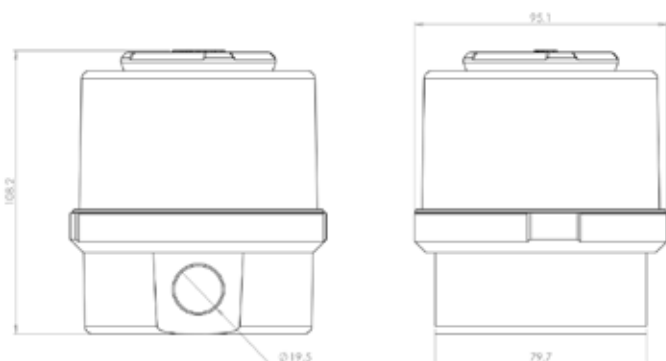

OPTIONAL

Available in a combo unit

