



This 16 LED flare has 9 flash patterns. It is shock resistant, waterproof and durable. The magnet allows the unit to be attached to metal surfaces. The emergency flare can be recharged using a 12V car charger or a 220V wall charger (supplied with unit).

BEACONS & LIGHTS   

# Sirenco Emergency Flare

## SPECIFICATIONS

VOLTAGE	Battery Operated (3.7V Li-ion)
COLOURS	Red; Amber; Blue; Green; Clear; Yellow
LIGHT SOURCE	16 High Bright LED'S
FUNCTIONS	9 Selectable mode settings
CHARGING METHOD	220Vac Wall Charger or 12Vdc Car Charger
CHARGING TIME	4 Hours
OPERATING TIME	5 - 60 hours (Depending on the flash setting)
CURRENT CONSUMPTION	1.5A Max
IP RATING	IP 67
WEIGHT	322g
PACKING DIMENSIONS	110mm x 90mm x 110mm

NOTES |


## PRODUCT CODES

<b>Code</b>	CH1EF1(x*)	CH1EF6(x*)
<b>Detail</b>	Single unit	Single unit

\* x = A for Amber/ B for Blue/ G for Green/ R for Red/ W for White/ Y for Yellow

## TECHNICAL DRAWINGS

All dimensions in mm

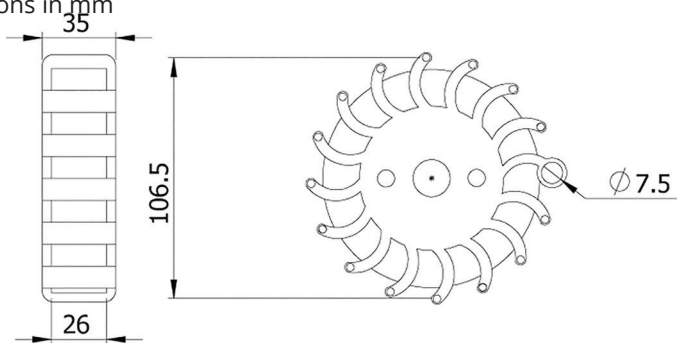

## OPTIONAL EXTRAS

6 pack with case



Charging Unit

