

# BANSHEE

## Ex Multi Sounder & LED Beacon S1




This electronic sounder and LED beacon combination unit is suitable for use in fiery mines as well as petrochemical plants and areas where an explosion-protected device is required. The unit consists of a 304 type stainless steel housing with a M20 cable entry, a stainless steel nose cone and a unique screw on lid for cable connection.

### BANSHEE EX MULTI SOUNDER & LED BEACON S1

#### SPECIFICATIONS

VOLTAGE	12-24VDC   110-220VAC
DUTY CYCLE	Continuous Rated
SOUND OUTPUT	110dB(A) at 1m
SOUND FREQUENCY	800 - 2400Hz
APP. RANGE	600m in still air on open field
COLOUR	Red, Amber, Blue, Green
LIGHT SOURCE	40 LED's
LIGHT INTENSITY	70 Lux Rotating   100 Lux Flashing   70 Lux Static
CURRENT CONSUMPTION	12VDC - 0.95A   24VDC - 0.45A   110VAC-220VAC - 0.07A
CLASSIFICATION	Ex db [ia] IIC T6 Gb   Ex tb IIIC T85°C Db IP65
CERTIFICATION	MASC S/22-2110X
GAS GROUPS	IIA, IIB, IIC, IIIA, IIIB, IIIC
IGNITION GROUP	T6 - 85°C
IP RATING	IP65
WEIGHT	11.3kg
PACKING DIMENSIONS	320x220x220mm

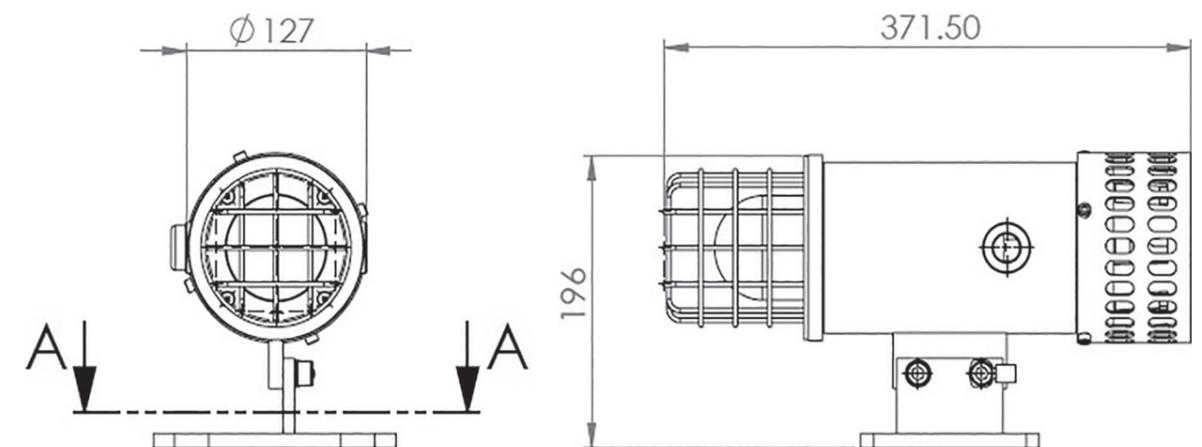

All dimensions are in mm

**BANSHEE** Part of the KAMA Group - [www.kama.co.za](http://www.kama.co.za)